

HVR SERIES

微波炉用 HVR 系列双向高压二极管
HVR SERIES BI-DIRECTIONAL HIGH VOLTAGE DIODES FOR MICROWAVE OVENS

 HVR-2X系列(HVE-2X Series)(T_A=25°C)


项目 Description	峰值反向电压 Peak Reverse Voltage		反向击穿电压 Reverse Breakdown Voltage		反向漏电电流 Reverse Leakage Current
符号 Symbols	V _{RM} (KV)		V _B (KV)		I _{RM} (μ A)
	D ₁	D ₂	D ₁	D ₂	
条件 Conditions	I _{RM} = 10 μ A	I _{RM} = 10 μ A	I _{RM} = 100 μ A	I _{RM} = 100 μ A	V _R = V _{RM}
HVR-2X0620A HVR-2X062H0A HVR-2X062H0A(M) HVR-2X062H1A(ML)	6.0	1.3 1.5 1.7 1.7	7.0min.	1.5 - 2.1 1.8 - 2.4 2.1 - 2.8 2.1 - 2.8	10

注：“0”A表示无端子，“1”A表示有端子；“M”或“ML”H听该产品仅用于微波炉。

“0”no terminal, “1” with terminal; “M” or “ML” means products used in micro wave oven only.

最大额定值(ABSOLUTE MAXIMUM RATINGS):

项目 Description	符号 Symbols	数值(Ratings)		单位 Units	条件 Conditions
		D1	D2		
贮存温度 Storage Temperature	T _{STG}	-40 - +30		°C	
结温 Junction Temperature	T _J	130		°C	
高温漏流 High Temperature Reverse Leakage Current	I _R	100		μ A	T _A = 125°C

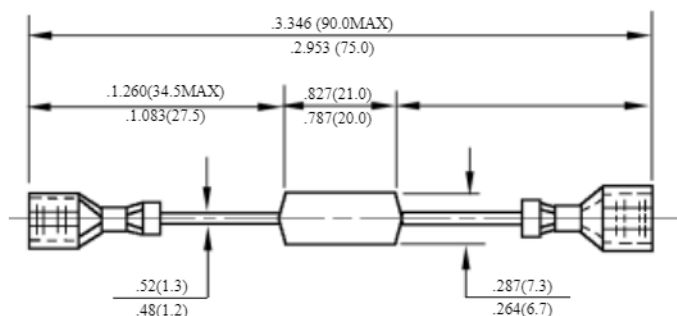

外形尺寸
Outline dimensions